

CANDIDATE  
NAME

CENTRE  
NUMBER

--	--	--	--	--

CANDIDATE  
NUMBER

--	--	--	--



**COMPUTER SCIENCE**

**9608/21**

Paper 2 Fundamental Problem-solving and Programming Skills

**October/November 2018**

**2 hours**

Candidates answer on the Question Paper.

No Additional Materials are required.

No calculators allowed.

**READ THESE INSTRUCTIONS FIRST**

Write your Centre number, candidate number and name in the spaces at the top of this page.

Write in dark blue or black pen.

You may use an HB pencil for any diagrams, graphs or rough working.

Do not use staples, paper clips, glue or correction fluid.

**DO NOT WRITE IN ANY BARCODES.**

Answer **all** questions.

No marks will be awarded for using brand names of software packages or hardware.

At the end of the examination, fasten all your work securely together.

The number of marks is given in brackets [ ] at the end of each question or part question.

The maximum number of marks is 75.

This document consists of **16** printed pages.

**Question 1 begins on the next page.**

---

Permission to reproduce items where third-party owned material protected by copyright is included has been sought and cleared where possible. Every reasonable effort has been made by the publisher (UCLES) to trace copyright holders, but if any items requiring clearance have unwittingly been included, the publisher will be pleased to make amends at the earliest possible opportunity.

To avoid the issue of disclosure of answer-related information to candidates, all copyright acknowledgements are reproduced online in the Cambridge International Examinations Copyright Acknowledgements Booklet. This is produced for each series of examinations and is freely available to download at [www.cie.org.uk](http://www.cie.org.uk) after the live examination series.

Cambridge International Examinations is part of the Cambridge Assessment Group. Cambridge Assessment is the brand name of University of Cambridge Local Examinations Syndicate (UCLES), which is itself a department of the University of Cambridge.

- 1 (a) The following table contains statements written in pseudocode.

Show what type of programming construct each statement represents.

Put a tick (✓) in the appropriate column for each statement.

Statement	Selection	Repetition (Iteration)	Assignment
WHILE Count < 20			
Count ← Count + 1			
IF MyGrade <> 'C' THEN			
Mark[Count] ← GetMark(StudentID)			
ELSE OUTPUT "Fail"			
ENDFOR			

[6]

- (b) (i) The following table contains statements written in pseudocode.

Give the most appropriate data type for the variable used in each statement.

Statement	Data type
MyAverage ← 13.5	
ProjectCompleted ← TRUE	
Subject ← "Home Economics"	
MyMark ← 270	
MyGrade ← 'B'	

[5]

- (ii) The following table contains statements written in pseudocode.

Complete the table by evaluating each expression using the values from **part (b)(i)**.

If any expression is invalid, write "ERROR" in the **Evaluates to** column.

For the built-in functions list, refer to the **Appendix** on page 16.

Expression	Evaluates to
"Air-" & MID(Subject, 7, 3)	
INT(MyAverage / 2)	
ProjectCompleted AND MyMark > 270	
ProjectCompleted OR MyMark > 260	
ASC(MyGrade / 3)	


[5]

- 2 Shop customers have a discount card with a unique card number. Customers collect points after they have bought items. The more points they have, the bigger the discount. If they shop on a Wednesday, their discount is increased by 20%.

The function `GetDiscountRate()` takes a card number as a parameter and returns the discount rate for a customer based on the number of points they have collected. A flowchart for the function is shown.

The function uses the following variables and functions.

Identifier	Data type	Description
DRate	REAL	The discount rate
CardNum	STRING	The unique customer card number
Points	INTEGER	The number of points collected
GetPoints()	FUNCTION	Takes the card number as a parameter and returns the number of points already collected
Today()	FUNCTION	Returns the day number: 1 for Monday, 2 for Tuesday etc.

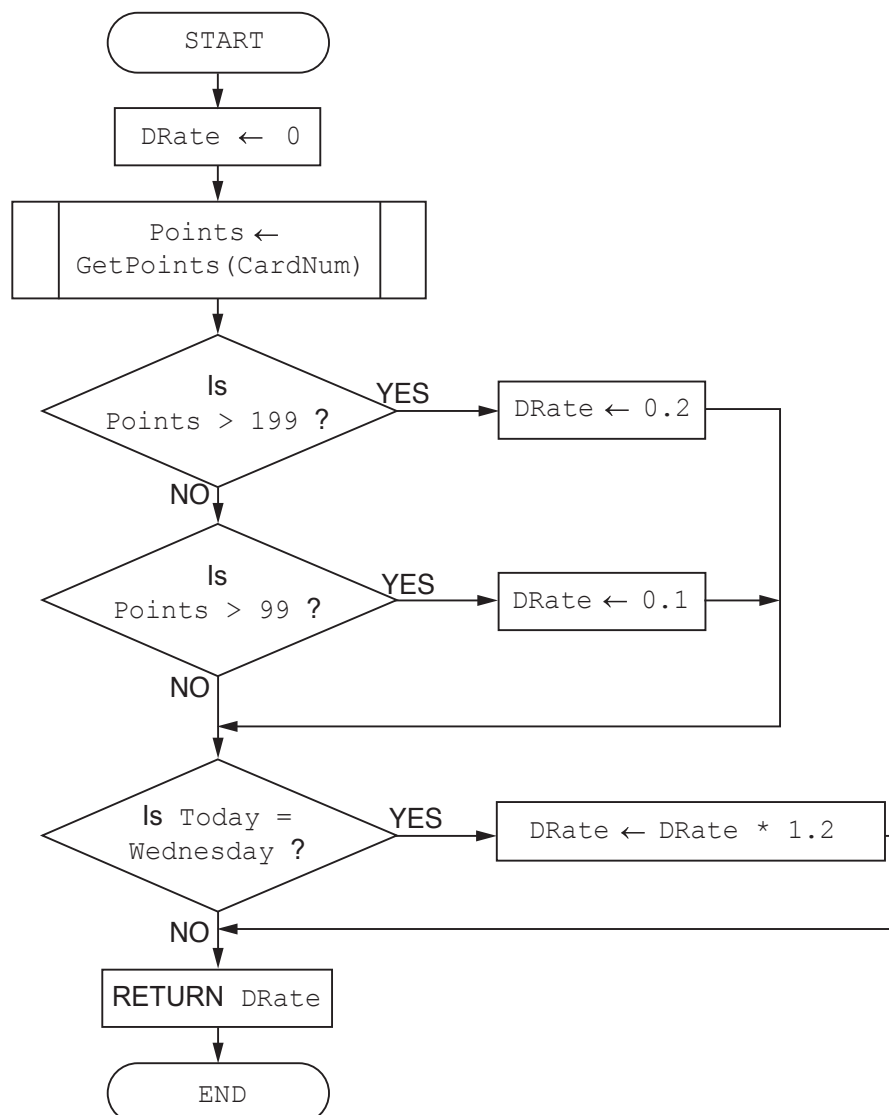



(b) A programmer writes the function `GetDiscountRate()` in a high-level language.

(i) A run-time error could occur when the function is used.

Name **and** describe **one** other type of error that the function could contain.

Name .....

Description .....

.....

.....

[2]

(ii) Function `GetPoints()` has not been written yet.

Name **and** describe a strategy that can be used to test `GetDiscountRate()` before the `GetPoints()` function has been written.

Name .....

Description .....

.....

.....

[2]

(c) There are different ways to minimise the risk of errors when writing programs, such as the use of constants and library routines.

(i) Identify **two** values that could be replaced by constants in the function

`GetDiscountRate()`.

.....

.....[1]

(ii) Write **pseudocode** to declare **one** of the constants you have given in **part (c)(i)**.

.....[2]

(iii) Explain how the use of constants helps to minimise programming errors.

.....

.....

.....

.....[2]

(iv) Give a reason why the use of library routines helps to minimise the risk of errors when writing a program.

.....  
.....[1]

(v) Constants and library routines help to minimise the risk of errors.

Name another way that you can minimise the risk of errors when writing a program.  
Explain how this helps.

Name .....

Explanation .....

.....  
.....

[2]

- 3 (a) State why a high-level language program must be translated before it can be run.

.....  
 .....[1]

- (b) A program runs but does not give the expected output.

Describe **two** methods you could use to find the error.

Method 1 .....

.....

.....

.....

Method 2 .....

.....

.....

.....

[4]

- (c) Two testing methods are black-box and white-box. A student is choosing test data for both methods.

Tick **one or more** boxes in each row to identify the testing method each statement describes.

Statement	White-box	Black-box
The student does not need to know the structure of the code.		
The student chooses data to test every possible path through the code.		
The student chooses normal, boundary and erroneous data.		
The student chooses data to test that the program meets the specification.		

[4]



**Question 4 begins on the next page.**

4 Part of a program written in pseudocode is shown.

```
01 DECLARE NumElements : INTEGER
...
10 FUNCTION ScanArray(SearchString : STRING) RETURNS INTEGER
11
12     DECLARE ArrayIndex : INTEGER
13     DECLARE ArrayString : STRING
14     DECLARE NumberFound : INTEGER
15
16     ArrayIndex ← 0
17     NumberFound ← 0
18
19     FOR ArrayIndex ← 1 TO NumElements
20         ArrayString ← ResultArray[ArrayIndex, 1]
21         IF ArrayString = SearchString
22             THEN
23                 CALL SaveToFile(ArrayString)
24                 NumberFound ← NumberFound + 1
25         ENDIF
26     ENDFOR
27
28     RETURN NumberFound
29
30 ENDFUNCTION
```

(a) (i) Examine the pseudocode and complete the following table.

**Answer**

The identifier name of a global integer	
The identifier name of a user-defined procedure	
The line number of an unnecessary statement	
The scope of ArrayString	

[4]

(ii) Describe in detail the purpose of lines 19 to 26 in the function ScanArray(). Do not use pseudocode in your answer.

.....  
.....  
.....  
.....  
.....  
.....  
.....  
.....

[4]

- (b) The function ScanArray() needs to be amended so that the comparison is not case sensitive. For example, comparing “Aaaa” with “AAAa” should evaluate to TRUE.

Write **program code** to implement the **amended** ScanArray() function.

Visual Basic and Pascal: You should include the declaration statements for variables.  
Python: You should show a comment statement for each variable used with its data type.

Programming language .....

Program code

Dotted lines for writing program code and marking.

[6]

(c) The function `ScanArray()` is one of a number of sub-tasks within a program.

Name the process that involves the splitting of a problem into sub-tasks **and** state **two** advantages of this approach.

Name .....

Advantage 1 .....

.....

Advantage 2 .....

.....

[3]

(d) `ResultArray` is a 2D array of type `STRING`. It represents a table containing 100 rows and 2 columns.

Write **program code** to declare `ResultArray` **and** set all elements to the value `'*'`.

Programming language .....

Program code

.....

.....

.....

.....

.....

.....

.....

.....

[3]

**Question 5 begins on the next page.**

- 5 A program collects data about the performance of a car at regular time intervals. A text file, `CarStatus.txt`, stores the data.

The format of each line of the text file is as follows:

`<Time>,<Amount of fuel used>,<Distance travelled>`

Data items are separated by a `' , '` (comma) character.

The program contains the following functions.

Function	Description
<code>GetTime()</code>	Returns a string representing the current time. May return <code>NULL</code> under certain circumstances.
<code>GetFuel()</code>	Returns a string representing the amount of fuel used
<code>GetDistance()</code>	Returns a string representing the distance travelled

The function `SaveStatus()` will:

- obtain the time, fuel used and distance data using the appropriate function calls
- check that the time string is not `NULL`
- return `FALSE` if the current time string remains `NULL` after three attempts
- form the text string, write it to the file and return `TRUE`

The file should not be open longer than necessary.



## Appendix

### Built-in functions (pseudocode)

In each function, if the function call is not properly formed, the function returns an error.

`MID(ThisString : STRING, x : INTEGER, y : INTEGER)` RETURNS STRING  
returns a string of length `y` starting at position `x` from `ThisString`

Example: `MID("ABCDEFGH", 2, 3)` returns string "BCD"

`LENGTH(ThisString : STRING)` RETURNS INTEGER  
returns the integer value representing the length of `ThisString`

Example: `LENGTH("Happy Days")` returns 10

`LEFT(ThisString : STRING, x : INTEGER)` RETURNS STRING  
returns leftmost `x` characters from `ThisString`

Example: `LEFT("ABCDEFGH", 3)` returns string "ABC"

`RIGHT(ThisString: STRING, x : INTEGER)` RETURNS STRING  
returns rightmost `x` characters from `ThisString`

Example: `RIGHT("ABCDEFGH", 3)` returns string "FGH"

`TO_UPPER(ThisString : STRING)` RETURNS STRING  
returns a string formed by converting all lower case alphabetic characters of `ThisString` to upper case. Other characters will be unchanged.

Example: `TO_UPPER("Disk Error 27")` returns "DISK ERROR 27"

`INT(x : REAL)` RETURNS INTEGER  
returns the integer part of `x`

Example: `INT(27.5415)` returns 27

`ASC(ThisChar : CHAR)` RETURNS INTEGER  
returns the ASCII value of character `ThisChar`

Example: `ASC('A')` returns 65

### Operators (pseudocode)

Operator	Description
&	Concatenates (joins) two strings Example: "Summer" & " " & "Pudding" produces "Summer Pudding"
AND	Performs a logical AND on two Boolean values Example: TRUE AND FALSE produces FALSE
OR	Performs a logical OR on two Boolean values Example: TRUE OR FALSE produces TRUE